


NOTES: (CONT'D)
 6. IF THE EQUIPMENT IS TO DRY (OR REACTIVATE WITH) A GAS OTHER THAN AIR, THE OUTLETS OF THE SAFETY VALVE, REACTIVATION GAS OUTLET LINE, BLOWDOWN VALVES, ETC. TO BE PIPED AWAY TO A SAFE LOCATION (BY PURCHASER). IN PIPING AWAY GAS, DO NOT PIPE UPWARD WITHOUT ADEQUATE ARRANGEMENTS TO PREVENT TRAPPING CONDENSATION.

7. CUSTOMER SHOULD REQUEST A COPY OF QMS-013 IF PLANNING ON STORING UNIT LONG TERM BEFORE PLACING INTO SERVICE.
 8. WEIGHTS: SHIPPING WEIGHT 445 LBS. (APPROX.)
 OPERATING WEIGHT 202 KGS (APPROX.)

NOTES:
 1. THIS DRAWING, TOGETHER WITH P&ID AND SPECIFICATION SHEET, PROVIDES OPERATING CONDITIONS, SPECIFICATIONS, INSTALLATION, MOUNTING AND CONNECTION REQUIREMENTS.
 2. PRESSURE VESSELS ARE DESIGNED AND BUILT IN ACCORDANCE WITH THE CURRENT CODE AND ADDENDA OF SECTION VIII, DIV. I, OF THE A.S.M.E. CODE FOR UNFIRED PRESSURE VESSELS.
 3. ELECTRICAL CONSTRUCTION IS IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE.
 4. ANCHOR BOLTS ARE TO PROJECT A MINIMUM OF 2" ABOVE THE FOUNDATION. ANCHOR BOLTS SHOULD BE INSTALLED IN SLEEVES TO ALLOW SOME ADJUSTMENT AT TIME OF INSTALLATION.
 5. FOR MAINTENANCE PURPOSES, RECOMMENDED CLEARANCE AROUND DRYER IS 4 FEET [1220 MM].

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	UNAUTHORIZED USE, MANUFACTURE, OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED. DRAWING DESIGN AND OTHER DISCLOSURES ARE PROPERTY OF: AN SPX BRAND * DO NOT SCALE. USE DIMENSIONS ONLY *	
DIMENSIONS ARE IN: INCHES/MM		DWN BY	SDM		08/01/11
SURFACE FINISH: N/A ✓		ENG BY	DEH		08/01/11
TOL. MM INCHES		CHK BY	DBR		08/01/11
.X .XX .XXX		APP BY	MPS		08/01/11
FRACT: ±1/2 ANG: ±2°		REL BY	SDM	08/01/11	
SCALE: 3/32 WT: N/A		CAT NO.			
		ID NO.			

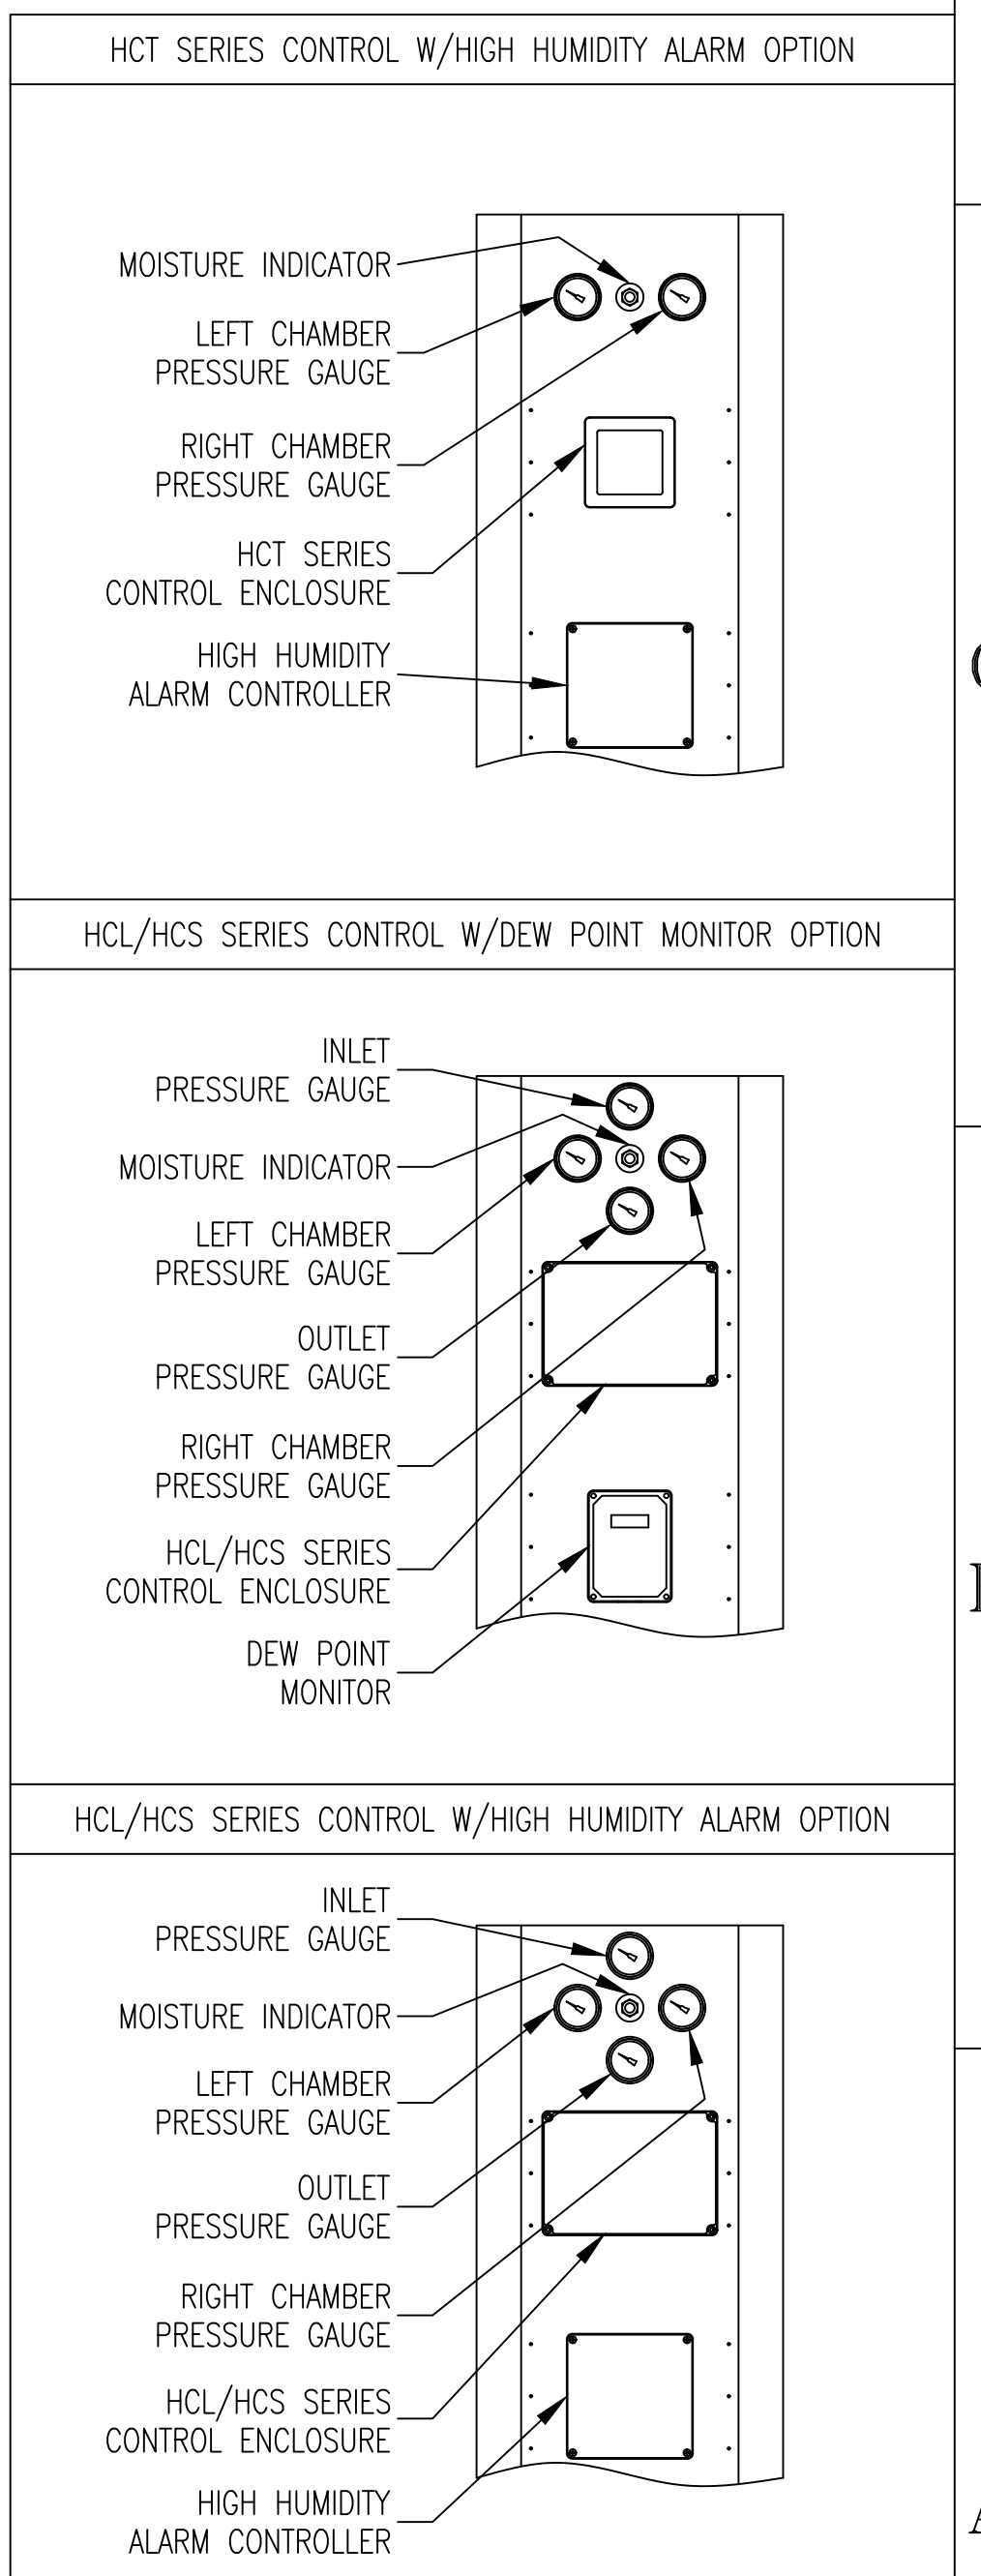

GENERAL ARRANGEMENT
 HCS/HCL/HCT 60
 SIZE DWG. NO. D 0059308-60 REV. SHEET 1/1