
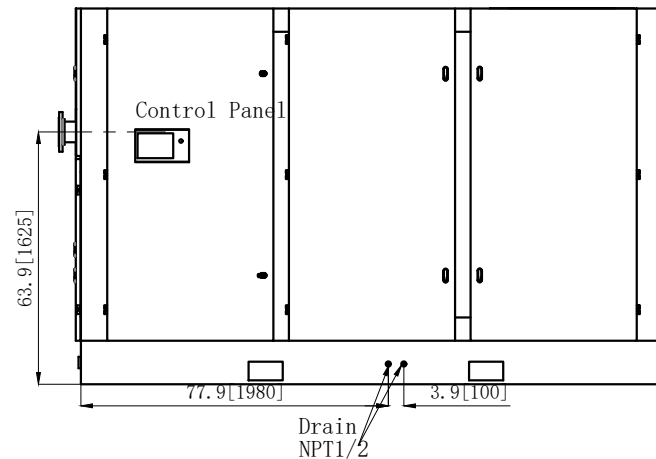



View A

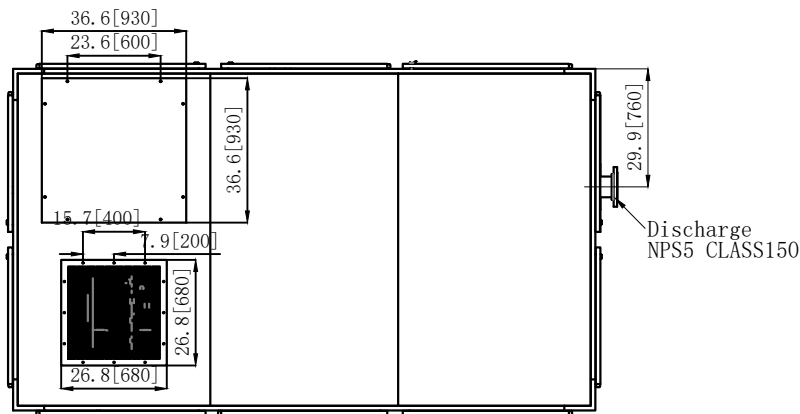

Specification

1. The compressor must have at least 4 feet of clearance around all side for proper ventilation and cooling.
2. The compressor must be installed on a smooth, level surface capable of supporting the gross weight of the machine.

UNLESS OTHERWISE SPECIFIED							
TOLERANCE ON ANGLES: +/- 0.5 DEGREE							
MACHINED PARTS TOLERANCE: +/- 0.03 in				KRSP-400/500WC FS			
SHEETMETAL TOLERANCE: +/- .13 in				Outline Dimensions			
FINISH ON MACHINED SURFACES $\nabla_{12.5}$				DESIGN	PHASE SIGN	WEIGHT	SCALE
			STD				SP400/500W-100.00
				S			1:30
CHECK			AUDITING				REF. ONLY
			APPROVE		SHEET 1 OF 1		NEXT ASSE