

# Specifications

<b>Port Sizes</b>	3"
<b>Thread Styles</b>	NPT
<b>Flow Capacity</b>	1200 SCFM @ 100 PSI
<b>Filter Capacity</b>	3.0 micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max. Temp./Pressure (Aluminum Bowl)</b>	175 °F/200 PSIG (Manual drain) 175 °F/150 PSIG (Float drain)
<b>Approx. Weight (lb.)</b>	38.0
<b>ISO Class</b>	3 Particulate


**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**



For higher pressure units, consult factory.

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1M-1200
<b>B</b> Manual Drain, Ball Valve	BV-051
<b>C</b> External Automatic Float Drain	N32-95-XD8
<b>D</b> Bowl O-ring	PHC-032

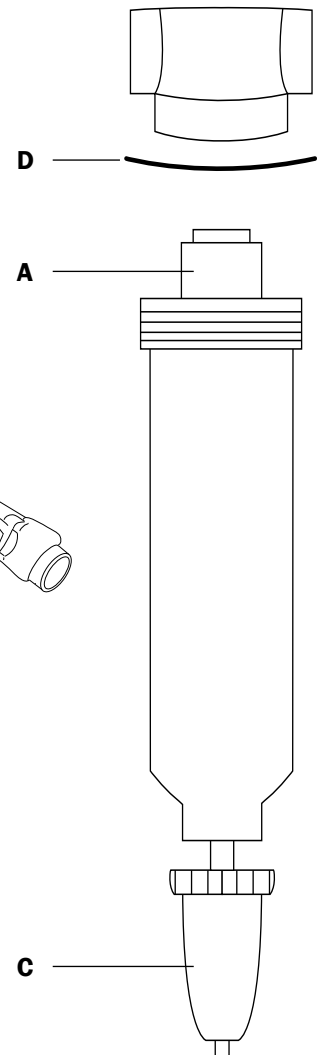

# Order Guide

Drain Type	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual	3"	1M-1200-M24-P	40.0	8.0	7.3
External Automatic	3"	1M-1200-M24-F	44.0	8.0	7.3