


Features & Benefits

- Unique, energy efficient cycling dryer reduces costs up to 80%
- Compact size for easy fit
- Automatic timer drain (with manual override)
- No gas expansion valve = no freezing up
- Low maintenance, long life design
- On/Off switch with multi-function display



Specifications

- 20-2000 SCFM, depending on model
- Port sizes: ¼" - 4"
- Maximum work: 230 PSIG
- Maximum temperature: 158 °F
- Maintains constant dew point: 38 °F

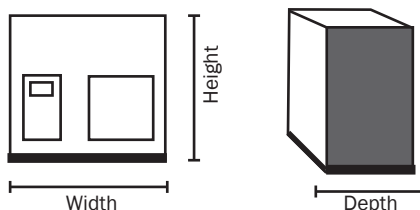

Order Guide

Cycling

Model Number	Air Flow (SCFM)	Pressure Drop (PSI)	Air Connection (NPT)	Net Weight (lb.)	Height (in.)	Width (in.)	Depth (in.)
RD 0025	25	0.7	½"	46	16	14	12
RD 0035	35	1.1	½"	48	16	14	12
RD 0050	50	0.4	1"	79	25	15	20
RD 0075	75	0.8	1"	90	25	15	20
RD 0100	100	1.4	1"	93	25	15	20
RD 0125	125	1.3	1"	165	34	27	20

Non-Cycling

Model Number	Air Flow (SCFM)	Pressure Drop (PSI)	Air Connection (NPT)	Net Weight (lb.)	Height (in.)	Width (in.)	Depth (in.)
RDNC 0020	20	1.3	½"	55	19	15	20
RDNC 0035	35	2.0	½"	62	19	15	20
RDNC 0050	50	4.6	½"	71	19	15	20
RDNC 0075	75	3.5	1"	75	29	14	17
RDNC 0100	100	2.3	1¼"	86	29	14	18
RDNC 0150	150	4.9	1¼"	90	29	14	18

Call factory for various power supply options for each model.