

# COMPLETE INDUSTRIAL SOLUTION


## TSUNAMI ULTRA SERIES DRYING SYSTEMS

Tsunami Ultra Drying Systems are designed as complete packages with Tsunami pre-filters, Programmable Logic Controller (PLC) and Moisture Minder Automatic Drains. The optimal solution for any facility; chose from a wall-mounted, tank-mounted, or rail-mounted unit. Built-in bypass systems allow the dryers to be shutoff for maintenance or service without stopping production.



### ULTRA DRYERS BENEFITS

- Ultra low dew points, down to  $-80^{\circ}\text{F}$
- Low relative humidity, down to .01% RH
- Tsunami 2-stage pre-filtration - oversized to allow for dryer expansion
- Programmable Logic Control (PLC)
- Expandable drying technology
- Dual inlet/outlet ports - allows for multiple installation configurations

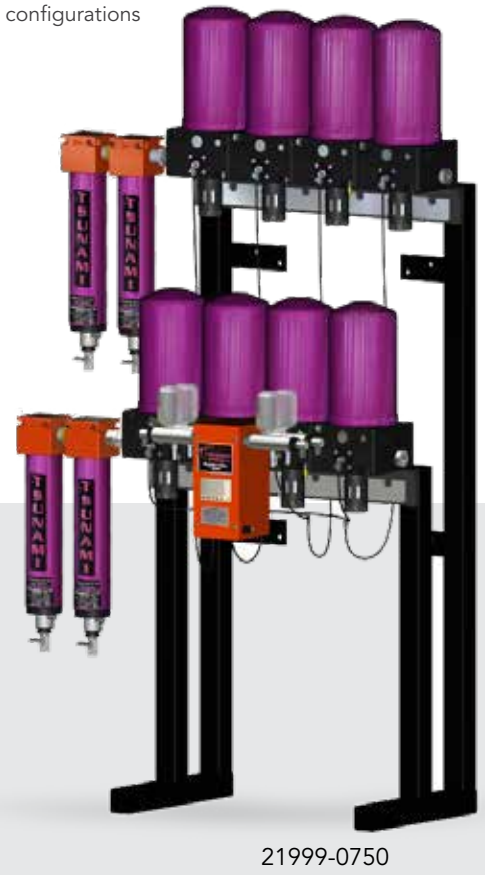

FOR MORE INFORMATION ON TSUNAMI

**Contact Your Parts Supplier or Call 1.800.782.5752**

10531 Dalton Ave NE | Monticello, MN 55362 | [TSUNAMI.US.COM](http://TSUNAMI.US.COM)

## ULTRA SERIES DRYING SYSTEMS

Tsunami Compressed Air Solutions™ offers premium air filtration and drying equipment designed to assist customers in obtaining clean, dry air for their specific application needs.

- 1 **Regenerative Air Dryer**
- 2 **PLC Controller**
- 3 **Pneumatic Drains**
- 4 **80 Gallon Receiver Tank (Tank Models)**
- 5 **High Flow Piston Outlet Regulator (Tank Models)**
- 6 **Pre-Filtration:**
  - 1st Stage Water Separator
  - Particulates down to 10 micron
  - Removes up to 1 quart/minute
  - 2nd Stage Oil Coalescing Filter
  - Particulates down to .01 micron
  - Aerosols down to .001 ppm
  - 99.99% efficiency



21999-0830

View all Tsunami dryers:



21999-0715



21999-0760

## SIZING & ORDERING INFORMATION

MAX CFM	SIZE	ITEM #	DESCRIPTION	PORT SIZE	DRAIN	MAX PSI	MAX F°	WEIGHT	DIMENSIONS (HWD)
40	10 HP	21999-0710	Wall Mounted	1" NPT	Pneumatic	175	150°F	73 lbs	30" x 30" x 12"
60	15 HP	21999-0715	Wall Mounted	1" NPT	Pneumatic	175	150°F	93 lbs	30" x 36" x 12"
80	20 HP	21999-0720	Wall Mounted	1" NPT	Pneumatic	175	150°F	118 lbs	30" x 42" x 12"
120	30 HP	21999-0730	Wall Mounted	1" NPT	Pneumatic	175	150°F	118 lbs	30" x 42" x 12"
40	10 HP	21999-0810	Tank Mounted - 80 gal.	1" NPT	Pneumatic	175	150°F	335 lbs	69" x 51" x 27"
60	15 HP	21999-0815	Tank Mounted - 80 gal.	1" NPT	Pneumatic	175	150°F	358 lbs	69" x 51" x 27"
80	20 HP	21999-0820	Tank Mounted - 80 gal.	1" NPT	Pneumatic	175	150°F	381 lbs	69" x 51" x 27"
120	30 HP	21999-0830	Tank Mounted - 80 gal.	1" NPT	Pneumatic	175	150°F	381 lbs	69" x 51" x 27"
160	40 HP	21999-0740	Rail Mounted	1" NPT	Pneumatic	175	150°F	267 lbs	66" x 36" x 21"
200	50 HP	21999-0750	Rail Mounted	1" NPT	Pneumatic	175	150°F	267 lbs	66" x 36" x 21"
300	75 HP	21999-0755	Rail Mounted	1" NPT	Pneumatic	175	150°F	482 lbs	66" x 36" x 42"
400	100 HP	21999-0760	Rail Mounted	1" NPT	Pneumatic	175	150°F	534 lbs	66" x 36" x 42"